

Bepop Label & Sign Printing Machine CPM-100E


MAX
MAX CO., LTD.

New!



The CPM-100E combines thermal printing and vinyl-cutting technology. Together with the dedicated MAX software, you can produce multi-colored labels and signs in any shape you want!



**Comes with the dedicated
"Bepop PC"
applications software**

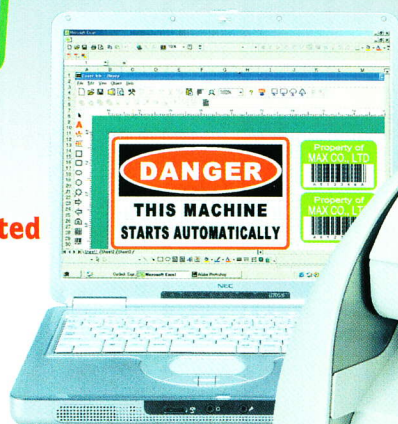

for Windows Vista/XP/2000

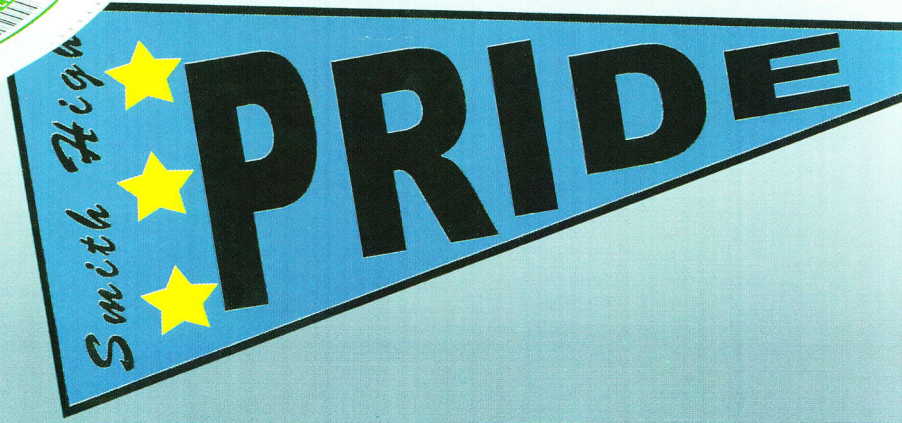

You can produce all your own labels and

Whatever you want, when you want it!


Printed labels



Caution label




Machine plate label



Warning sign



Pipe marking signs

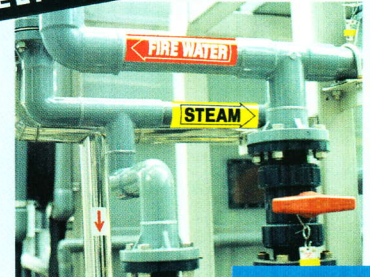

Maintenance date label



Warehouse rack label Bar Code label



Assets, Property ID label



Info sign



Facility Labeling sign



Patriotic sign



Phosphorescent sheet



Bumper sticker



Information sign



School sign

Standard Supplies for the CPM-100E



Bepop sheets

MAX exclusive perforated vinyl sheet

Available Colors

Color sheets

Black
White
Red
Blue
Yellow
Green
Orange
Sky Blue
Gray
Lettuce Green
Cobalt Blue
Navy
Amethyst
Chocolate

PET sheets

PET Hair-lined Silver
PET White
PET Matt Silver

Fluorescent sheets (Cutting only)

Fluorescent Red
Fluorescent Yellow
Fluorescent Green

Special material sheets (Printing only)

Reflective Sheet White
Clear Sheet
Paper Sheet

Phosphorescent sheet (unprintable)

--

Package : 4 rolls per carton

Size : 4"-3/8 x 32-13/16", (110mm x 10m)

Please contact your local dealer for availability of colors.

PRODUCT SPECIFICATIONS

Product	CPM-100E
Printer section	Printing method Thermal transfer
	Print resolution 200dpi
	Printing speed 1.0" (25mm) /sec. at standard 0.5" (12.5mm) /sec. for high quality
Cutter section	Resolution 0.001" (0.025mm) /step
	Cutting speed 4.7" (120mm) /sec. at maximum
Maximum output range	4" (100mm) x 78.7" (2000mm)
Interface	USB: USB1.1, Allowable cable length 78.7" (2M) Parallel: Compliant with IEEE1284, Allowable cable length 78.7" (2M)
Working environment	Temperature: 10-35°C, (50-95°F) Humidity: 35-80% (No dew condensation allowed)
Power source	AC 100-240V 50/60Hz 1A
Power consumption	150W at maximum, 20W at standby
Outer dimensions	12.8" (325mm) x 12.0" (305mm) x 12.4" (315mm) (W) x (D) x (H)
Weight	19.8lbs (9kg)

CONTENTS

CPM-100E, AC cable, Blade, Tweezers, Squeegee, Tool Holder, Tool Holder replacing spanner, Application software CD, Instruction manual

The specifications and design of the products in this catalogue will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



MAX CO., LTD.

6-6, NIHONBASHI, HAKOZAKI-CHO, CHUO-KU, TOKYO, JAPAN

PHONE: 81-3-3669-8131 FAX: 81-3-3669-7104

Web: <http://www.max-ltd.co.jp/int/>

Distributor:

AUTHORIZED DEALER:

BDC Brooks Duplicator Company

10402 Rockley Road

Houston, TX 77099

(281) 568-9787 or (800) 566-4287

www.brookscompany.com



Bepop ink ribbons

MAX exclusive ink ribbon

Available Colors

Black
White
Red
Blue
Yellow
Dark Blue
Green
Dark Green
Gray
Orange
Black Ribbon for paper
Clear (Abrasion Guara)

Package : 4 rolls per carton

Size : 4"-3/4 x 164", (120mm x 50m)

Please contact your local dealer for availability of colors.

RECOMMENDED PC REQUIREMENTS

DOS-V machines with the following conditions;

■ CPU: Intel Pentium 150MHz or better

■ MEMORY: 64MB or better

■ Free spaces of HDD: 100MB or better

■ CD-ROM Drive

■ OS: Windows Vista/XP/2000

Windows Me/98SE/98 compatible drivers/applications are available by downloading from MAX web site

■ INTERFACE: Parallel (Centronics), USB (ver1.1)

Windows® is a registered trademark of Microsoft Corporation® (US) in U.S.A or in other countries.

Pentium® is a registered trademark of Intel Corporation® (US) in U.S.A or in other countries.



Printed on
Recycled Paper
PRINTED IN JAPAN
OS7708AN D0712